



THE ESSENTIALS 2024  
SOLUTIONS SPECIALISTS  
**FOR SMART BUILDINGS**





GIGAMEDIA is a French brand created in 1996 that has established itself as the **leading distributor of cabling systems** in France, and has expanded rapidly across Europe and now Canada.

GIGAMEDIA provides **a full range of innovative solutions for small and medium contractors**, dedicated to the distribution of cabling systems, IT and telecommunications networks.

The solutions offered by GIGAMEDIA are key elements of smart building infrastructures with the following ranges: video surveillance kits, cameras, switches and copper cabling solutions that offer a full **GIGAMEDIA solution for your security and datacom projects**.

## SEEKING SECURITY SOLUTIONS?

GET INSPIRED AND SEE  
WHAT WE HAVE ON OFFER RIGHT NOW!



Visit us on:  
**nedco.ca**



SCAN THIS  
QR CODE

Watch over your success  
our security solutions await!







*Fuel your security*



Small office



Eyes on  
EVERY  
detail

Retail shop



School

In ALL your  
projects



Coffee shop

Restaurant



**NEED HELP?**

**OUR EXPERTS  
HAVE YOU COVERED!**

- ▶ Through your local REXEL branch
- ▶ Via our dedicated online portal featuring FAQ, tutorials, how-to videos and a knowledge database



## VIDEOSURVEILLANCE SOLUTION 5 MP KIT (WITH BULLET CAMERA)



**4 (or 8) bullet camera**

**+ 1 PoE NVR 8 (or 16) channel**

**+ 2 (or 4) TB HDD**

### CAMERA FEATURES

- ▶ Video compression: H265 / H264 real time
- ▶ Type of sensor: 1/2.7" SC500AI progressive CMOS
- ▶ Resolution: 5 MP (2880 x 1620 px)
- ▶ Sensitivity: 0.004 lx
- ▶ Focal lens: fixed lens, 2.8 mm
- ▶ Angle of view: 110°
- ▶ IR 30 m
- ▶ Installation environment: indoor/outdoor
- ▶ Power supply: PoE (802.3af) or 12 VDC
- ▶ IP67
- ▶ Built-in microphone



### NVR FEATURES

- ▶ Video compression: H265 / H264
- ▶ Video input: 8 or 16 CH 5 MP PoE powered
- ▶ Audio output: 1 CH RCA connector
- ▶ HDMI output: up to 4K
- ▶ VGA output: up to 1080p
- ▶ Alarm I/O: 8/1 or 16/1
- ▶ HDD capacity: 2 TB or 4 TB included (up to 10 TB)
- ▶ Mobile app: GGM VIEW
- ▶ AI function: supported



| P/N                     | DESCRIPTION  |
|-------------------------|--|
| <b>GGM KITIP48C5MP</b>  | 5 MP videosurveillance kit 4 bullet camera + 1 PoE NVR 8 channel + 2 TB HDD  |
| <b>GGM KITIP816C5MP</b> | 5 MP videosurveillance kit 8 bullet camera + 1 PoE NVR 16 channel + 4 TB HDD |
| <b>GGM IPCLB5F28</b>    | IP mini bullet 5MP IR 20 m fixed lens 2.8 mm                                 |
| <b>GGM IPCBJ011</b>     | Wall / ceiling mount junction box (GGM IPCLB5F28 / GGM IPCD5F28)             |



4 (or 8) dome camera

+ 1 PoE NVR 8 (or 16) channel

+ 2 (or 4) TB HDD



SCHOOL



COFFEE SHOP



SMALL OFFICE



RETAIL



RESTAURANT

#### CAMERA FEATURES

- ▶ Video compression: H265 / H264 real time
- ▶ Type of sensor: 1/2.7" SC500A1 progressive CMOS
- ▶ Resolution: 5 MP (2880 x 1620 px)
- ▶ Sensitivity: 0.004 lx
- ▶ Focal lens: fixed lens, 2.8 mm
- ▶ Angle of view: 110°
- ▶ IR 20 m
- ▶ Installation environment: indoor/outdoor
- ▶ Power supply: PoE (802.3af) or 12 VDC
- ▶ IK10
- ▶ Built-in microphone



#### NVR FEATURES

- ▶ Video compression: H265 / H264
- ▶ Video input: 8 or 16 CH 5 MP PoE powered
- ▶ Audio output: 1 CH RCA connector
- ▶ HDMI output: up to 4K
- ▶ VGA output: up to 1080p
- ▶ Alarm I/O: 8/1 or 16/1
- ▶ HDD capacity: 2 TB or 4 TB included (up to 10 TB)
- ▶ Mobile app: GGM VIEW
- ▶ AI function: supported



| P/N                       | DESCRIPTION   |
|---------------------------|---|
| <b>GGM KITIP48CDM5MP</b>  | 5 MP videosurveillance kit 4 vandalproof dome + 1 PoE NVR 8 channel + 2 TB HDD  |
| <b>GGM KITIP816CDM5MP</b> | 5 MP videosurveillance kit 8 vandalproof dome + 1 PoE NVR 16 channel + 4 TB HDD |
| <b>GGM IPCDM5F28</b>      | IP dome camera 5MP IR 20 m focal lens 2.8 mm IK10                               |
| <b>GGM IPCBJ015</b>       | Junction box wall / ceiling for GGM IPCDM5F28                                   |
| <b>GGM IPCBJ016</b>       | Junction box for GGM IPCDM5F28  |
| <b>GGM IPCBJ007</b>       | Ceiling fixing tube for junction box  |
| <b>GGM IPCBJ008</b>       | Wall fixing foot for junction box   |





## VIDEOSURVEILLANCE SOLUTION BULLET CAMERA


**5MP**
**IP67**

Bullet cameras for retails and tertiary business. All the range support PoE technology. High quality sensor will provide a clear picture even in low light condition. Every camera includes analytics functions to anticipate threats and get the most out of your solutions


**GGM IPCB5MV12E**

- 5 MP
- Motorized
- IR 40 m
- IP67
- AI


**GGM IPCB5VFM550VE**

- 5 MP
- Motorized
- IR 80 m
- IP67
- AI


**GGM IPCLB5F28**

- 5 MP
- Fixed
- IR 30 m
- IP67

|                          |  |  |                                    |
|--------------------------|--|--|------------------------------------|
| <b>Resolution @ fps</b>  | 2592 x 1944 @ 30 fps                       | 2592 x 1944 @ 30 fps                       | 2880 x 1620 @ 30 fps               |
| <b>Sensor</b>            | OS05A20 CMOS STARVIS<br>1/2.7" progressive | OS05A20 CMOS STARVIS<br>1/2.7" progressive | SC500AI CMOS<br>1/2.7" progressive |
| <b>Resolution (max.)</b> | 2592 x 1944                                | 2592 x 1944                                | 2880 x 1620                        |
| <b>Focal length</b>      | 2.7 ~ 13.5 mm                              | 5 ~ 50 mm                                  | 2.8 mm                             |
| <b>Focal lens</b>        | Motorized lens                             | Motorized lens                             | Fixed lens                         |
| <b>Sensitivity</b>       | 0.003 lx                                   | 0.003 lx                                   | 0.004 lx                           |
| <b>Angle of view</b>     | Horizontal: 102° ~ 31°                     | Horizontal: 45° ~ 7°                       | Horizontal: 110°                   |
| <b>Shutter speed</b>     | 1/5 ~ 1/20000 s                            | 1/5 ~ 1/20000 s                            | 1/5 ~ 1/20000 s                    |
| <b>WDR</b>               | 120 dB                                     | 120 dB                                     | 120 dB                             |
| <b>IR rated</b>          | 40 m                                       | 80 m                                       | 30 m                               |
| <b>Day / Night</b>       |  |  |                                    |
| <b>Dimension</b>         | 83.8 x 242 x 87.4 mm                       | 89.5 x 301 x 108 mm                        | 71 x 150 x 71 mm                   |
| <b>ONVIF</b>             | Profile S/G/T                              | Profile S/G/T                              | Profile S/G/T                      |
| <b>Power consumption</b> | < 9 W                                      | 10 W                                       | < 6 W                              |
| <b>Power supply</b>      | 12 V DC / PoE                              | 12 V DC / PoE                              | 12 V DC / PoE                      |
| <b>Accessories</b>       | GGM IPCBJ002                               | GGM IPCBJ002                               | GGM IPCBJ011                       |



5MP

IP67

Dome cameras are very popular for retail applications and fit with many indoor and outdoor situations.

All models support PoE technology.

They include analytics functions to anticipate threats and get the most of your solutions.

Furthermore, the GGM IPCD5MV12VE model is vandalproof and can be installed in harsh environments.



GGM IPCDM5F28

- 5 MP
- Fixed
- IR 20 m
- IP67
- AI



GGM IPCD5MV12VE

- 5 MP
- Motorized
- IR 30 m
- IP67
- Anti-vandal IK10
- AI

|                   |  |  |
|-------------------|--|--|
| Resolution @ fps  | 2880 x 1620 @ 30 fps   | 2592 x 1944 @ 30 fps                       |
| Sensor            | SC500AI CMOS<br>1/2.7" progressive                           | OS05A20 CMOS STARVIS<br>1/2.8" progressive |
| Resolution (max.) | 2880 x 1620  | 2592 x 1944                                |
| Focal length      | 2.8 mm   | 2.7 ~ 13.5 mm                              |
| Focal lens        | Fixed lens   | Motorized lens                             |
| Sensitivity       | 0.004 lx   | 0.003 lx                                   |
| Angle of view     | Horizontal: 110°   | Horizontal: 102° ~ 31°                     |
| Shutter speed     | 1/5 ~ 1/20000 s  | 1/5 ~ 1/20000 s                            |
| WDR               | 120 dB   | 120 dB                                     |
| IR rated          | 20 m   | 30 m                                       |
| Day / Night       |  |  |
| Dimension         | Ø 155 x 91.6 mm  | Ø 150 x 109 mm                             |
| ONVIF             | Profile S/G/T  | Profile S/G/T                              |
| Power consumption | 5.1 W  | 7.5 W                                      |
| Power supply      | 12 V DC / PoE  | 12 V DC / PoE                              |
| Accessories       | GGM IPCBJ007<br>GGM IPCBJ008<br>GGM IPCBJ015<br>GGM IPCBJ016 | GGM IPCBJ003<br>GGM IPCBJ009               |



## VIDEOSURVEILLANCE SOLUTION DOME EYEBALL CAMERA



Get remote access to  
your cameras through  
your mobile or  
tablet thanks to the  
**GGM VIEW** free app



**5MP**

**IP67**

**GGM IPCD5MV12E**

- 5 MP
- Motorized
- IR 45 m
- IP67
- AI

**GGM IPCD5F28**

- 5 MP
- Fixed
- IR 30 m
- IP67
- AI

|                   |                                    |                                    |
|-------------------|------------------------------------|------------------------------------|
| Resolution @ fps  | 2592 x 1944 @ 30 fps               | 2880 x 1620 @ 30 fps               |
| Sensor            | OS05A20 CMOS<br>1/2.7" progressive | SC500AI CMOS<br>1/2.7" progressive |
| Resolution (max.) | 2592 x 1944                        | 2880 x 1620                        |
| Focal length      | 2.7 ~ 13.5 mm                      | 2.8 mm                             |
| Focal lens        | Motorized lens                     | Fixed lens                         |
| Sensitivity       | 0.003 lx                           | 0.004 lx                           |
| Angle of view     | Horizontal: 102° ~ 31°             | Horizontal: 110°                   |
| Shutter speed     | 1/5 ~ 1/20000 s                    | 1/5 ~ 1/20000 s                    |
| WDR               | 120 dB                             | 120 dB                             |
| IR rated          | 45 m                               | 30 m                               |
| Day / Night       | ✓                                  | ✓                                  |
| Dimension         | Ø 135.56 x 127 mm                  | Ø 100 x 90 mm                      |
| ONVIF             | Profile S/G/T                      | Profile S/G/T                      |
| Power consumption | 9.5 W                              | 6 W                                |
| Power supply      | 12 V DC / PoE                      | 12 V DC / PoE                      |
| Accessories       | GGM IPCBJ002                       | GGM IPCBJ011                       |





5MP

IP66

For a discrete surveillance, you can choose the flat dome. It can be installed in many projects.


Analytics functions are also supported.

Thanks to its large angle of view and high resolution picture you will experience an efficient surveillance.














#### GGM IPCMD5F28

-  5 MP
-  Fixed
-  IR 20 m
-  IP66
-  AI

|                   |   |
|-------------------|---|
| Resolution @ fps  | 2880 x 1620 @ 30 fps  |
| Sensor            | SC500AI CMOS  |
|                   | 1/2.7" progressive  |
| Resolution (max.) | 2880 x 1620   |
| Focal length      | 2.8 mm  |
| Focal lens        | Fixed lens  |
| Sensitivity       | 0.004 lx  |
| Angle of view     | Horizontal: 110°  |
| Shutter speed     | 1/5 ~ 1/20000 s   |
| WDR               | 120 dB  |
| IR rated          | 20 m  |
| Day / Night       |  |
| Dimension         | Ø 115.3 x 64 mm   |
| ONVIF             | Profile S/G/T   |
| Power consumption | < 4 W   |
| Power supply      | 12 V DC / PoE   |

Intelligent analytics functions are embedded in cameras. These functions are very useful to anticipate threats, avoid false alarms and help you in your daily business. Here are all IA functions supported by the camera:

-  **CROSSING LINE**  
DETECTION
-  **PERIMETER INTRUSION**  
DETECTION
-  **HUMAN AND VEHICLE**  
DETECTION
-  **CROSS**  
COUNTING
-  **STATIONNARY OBJECT**  
DETECTION
-  **CROWD DENSITY**  
DETECTION
-  **QUEUE LENGTH**  
DETECTION
-  **LICENSE PLATE**  
DETECTION
-  **FACE**  
DETECTION
-  **HEATMAP**
-  **RARE SOUND**  
DETECTION

\* All intelligent functions can't be used at the same time. Please refer the GIGAMEDIA technical support web site for more information.



## VIDEOSURVEILLANCE SOLUTION FISHEYE CAMERA



5MP

IP66

### GGM IPCF12

- 12 MP
- 360°
- IR 10 m
- IP66
- Anti-vandal IK10
- AI

|                   |                         |
|-------------------|-------------------------|
| Resolution @ fps  | 3000 x 3000 @ 25 fps    |
| Sensor            | 1/2.3" CMOS progressive |
| Resolution (max.) | 4000 (H) x 3000 (V)     |
| Focal length      | 1.1 mm                  |
| Focal lens        | Fixed lens              |
| Sensitivity       | 0.01 lx                 |
| Angle of view     | 360°                    |
| Shutter speed     | 1/5 ~ 1/20000 s         |
| WDR               | DWDR                    |
| IR rated          | 10 m                    |
| Dimension         | Ø 120 x 55 mm           |
| ONVIF             | Profile S/G/T           |
| Power consumption | 9.6 W                   |
| Power supply      | 12 V DC / PoE           |
| Accessories       | GGM IPCBJ013            |

The fisheye camera provides a 360° angle of view.

The resolution of 12MP allows to zoom in easily in the picture while maintaining a high level of detail.

The Infrared can light up to 10 m. Built-in microphone can help you for remote check in case of problem.

This device is IP66 rated and also IK10 for installation in harsh environments.

Many analytics functions (AI) are supported by the camera.

Picture can be dewarped through the web interface of the NVR and also the GGM VIEW mobile app.

This discrete camera can be used in open spaces where a 360° surveillance is needed.

### FISHEYE CAMERA ACCESSORY

#### GGM IPCBJ013

Wall / Ceiling mount Junction Box  
Ø 126 mm ; H: 42 mm





**12MP** **IP66**



#### GGM IPCSD5X33IR150

- 5 MP
- Optical zoom 33x
- IR 150 m
- IP66

#### PTZ CAMERA ACCESSORIES

**GGM IPCSDPA**  
Pole fixing for IP GIGAMEDIA  
speed dome



**GGM IPCSDCA**  
Corner Mount for IP GIGAMEDIA  
speed dome



|                   |                            |
|-------------------|----------------------------|
| Resolution @ fps  | 2592 x 1944 @ 25 fps       |
| Sensor            | 1/2.7" CMOS progressive    |
| Resolution (max.) | 2592 x 1944                |
| Focal length      | 4.3 ~ 142 mm               |
| Focal lens        | PTZ - optical zoom 33x     |
| Sensitivity       | 0.003 lx                   |
| Angle of view     | 2.3 ~ 55°                  |
| Shutter speed     | 1/5 ~ 1/20000 s            |
| WDR               | 120 dB                     |
| IR rated          | 150 m                      |
| Day / Night       |                            |
| Dimension         | Ø 206.4 x 351 mm           |
| ONVIF             | Profile S/G/T              |
| Power consumption | 25.6 W                     |
| Power supply      | 12 V DC / PoE              |
| Accessories       | GGM IPCSDPA<br>GGM IPCSDCA |



Get remote access to  
your cameras through  
your mobile or  
tablet thanks to the  
**GGM VIEW** free app







## 8/16/32 CHANNEL

### POE NVR

GIGAMEDIA recorders provide excellent value for money for your security installations.

The range is dedicated to small and medium projects, with NVRs that integrate 8 to 16 ports to power your cameras directly and can support up to 32 camera streams (GGM NVR043216P).

The free HDD slots offer a capacity of 10 Tb, for your recordings up to 4K resolution.

All recorders embed a minimum of 8 alarm inputs to trigger recording on alarm and 1 alarm output.

They also support many AI functions linked with cameras for further pro-active surveillance.

ONVIF compliant (version 2.6 Profile S/T/G), they can accept other brands of cameras\*

Additionally, UPnP and P2P protocols will help you configure the remote access easily.

For further comfort, the GGM VIEW app is available on IOS and Android platform for remote access.

\* Integration test needed

#### FEATURES


- ▶ Maximum recording resolution: 4K
- ▶ WAN: RJ45 Ethernet port: 1000 Mbps
- ▶ H265/H264 compression codec
- ▶ Included power supply: 48 V DC
- ▶ P2P
- ▶ UPnP
- ▶ Intelligent analytics function embedded



GGM NVRL0108P



GGM NVR021616P



GGM NVR043216P

|                     |                   |                                  |                                  |
|---------------------|-------------------|----------------------------------|----------------------------------|
| Number of channels  | 8                 | 16                               | 32                               |
| Number of PoE ports | 8                 | 16                               | 16                               |
| Recording bandwidth | 128Mbps           | 112 Mbps                         | 256 Mbps                         |
| Free HDD slots      | 1                 | 2                                | 4                                |
| I/O alarm           | 8/1               | 16/1                             | 16/1                             |
| Format              | Desktop           | Desktop<br>or 19" rack mountable | Desktop<br>or 19" rack mountable |
| Dimensions (WxDxH)  | 300 x 227 x 53 mm | 380 x 340 x 51 mm                | 378 x 326 x 66 mm                |

## UNMANAGED SWITCH

### POE GIGABIT

The GIGAMEDIA unmanaged Gigabit PoE switches portfolio allows you to extend your network at lower cost while offering increased speed. Available in multiple formats, desktop or 19" rack mounted, from 4 to 24 ports. In order to guarantee the reliability that is needed, the unmanaged GIGAMEDIA Gigabit switches have been rigorously tested. The high PoE capacity from 65 W to 370 W allows you to supply all the IP peripherals such as cameras, WiFi access points or IP telephones. They will be the perfect companion for all your projects going from home users to small businesses.

#### FEATURES

- ▶ From 4 to 24 RJ45 ports
- ▶ Auto MDI/MDIX for all ports
- ▶ PoE / PoE+ capable
- ▶ Plug and Play
- ▶ 4 kV surge protection
- ▶ Desktop or 19" rackmount
- ▶ Non-blocking switching capacity
- ▶ 2-year warranty



GGM GS07P



GGM GS24P

| P/N       | DESCRIPTION  |
|-----------|--|
| GGM GS04P | Unmanaged Switch 6-port Gigabit inc. 4 PoE+ (PoE budget 65 W)  |
| GGM GS07P | Unmanaged Switch 8-port Gigabit inc. 7 PoE+ (PoE budget 110 W) |
| GGM GS16P | Unmanaged Switch 16-port Gigabit PoE+ (PoE budget 200 W)       |
| GGM GS24P | Unmanaged Switch 24-port Gigabit PoE+ (PoE budget 370 W)       |



## INJECTOR POE 30 W & 60 W



GIGAMEDIA PoE injectors provide up to 60 W to remote devices on a single RJ45 port.

They support 10/100/1000 Mbps data rates along with the power supply of equipment such as wireless access points, network cameras, IP phones and other high-power Ethernet terminals.

Both models are backward compatible with IEEE 802.3af PoE standard.

### MAIN FEATURES

- ▶ Transmission standard: Gigabit Ethernet
- ▶ Number of PoE ports: 1
- ▶ Frequency: 60 Hz
- ▶ Temperature: 0 °C ~ +40 °C

### GGM POEINJ30PI FEATURES

- ▶ PoE standard: 802.3at (PoE+)
- ▶ Max. PoE power: 30 W
- ▶ Power supply: 230 V, 550 mA
- ▶ Dimension (H x W x D): 140 x 63 x 33 mm

### GGM POEINJ60PI FEATURES

- ▶ PoE standard: 802.3bt (4PPoE)
- ▶ Max. PoE power: 60 W
- ▶ Power supply: 230 V, 1100 mA
- ▶ Dimension (H x W x D): 204 x 130 x 51 mm

| P/N                   | DESCRIPTION                               |
|-----------------------|---|
| <b>GGM POEINJ30PI</b> | Indoor 30 W PoE injector - plastic casing |
| <b>GGM POEINJ60PI</b> | Indoor 60 W PoE injector - plastic casing |

**Keep your eyes on every detail  
with GIGAMEDIA monitors range!**

Dedicated to security applications, the GGM CCMLCD21PPHV monitor is designed to operate 24/7 in Full HD resolution (1080p - 1920 x 1080).

Its LED technology provides a high quality colour rendition while its HDMI/VGA inputs allow a large number of peripherals to be connected.

Its size allows it to be placed on a desk using the supplied foot, or on a wall using an optional VESA 100 mounting bracket.

A must-have for your security applications!

### FEATURES

- ▶ LED panel
- ▶ Screen size: 21.5" (54 cm)
- ▶ Max resolution: 1920 x 1080
- ▶ Angle of view: 178° horizontal
- ▶ Display format (ratio): 16/9
- ▶ Contrast: 1000:1
- ▶ Brightness: 250 cd/m<sup>2</sup>
- ▶ HDMI 2.0 / VGA inputs
- ▶ Included: power supply, HDMI cord and foot
- ▶ Plastic housing
- ▶ VESA 100 compatible
- ▶ Dimensions (H x W x D): 380 x 508 x 200 mm




| P/N                     | DESCRIPTION  |
|-------------------------|--|
| <b>GGM CCMLCD21PPHV</b> | 21.5" Full HD plastic monitor, 1080p resolution with HDMI/VGA inputs |



## CAT6 U/UTP CABLES

### FEATURES

- ▶ Standards: ANSI/TIA-568.2-D, EN50173, ISO/IEC 11801, IEC 61156-5
- ▶ Applications: IEEE802.3: 5GBase-T, 2.5GBase-T, 1000Base-T, 100Base-Tx, 10Base-T  
IEEE 802.3af: PoE ; IEEE 802.3at: PoE+




## CMP CABLES

### FEATURES

- ▶ Fire rating: CMP - Plenum rated acc. to NFPA 262 & CAN/CSA-C22.2
- ▶ Outer diameter: 5.6 mm
- ▶ Outer jacket: PVC CMP

| P/N                  | DESCRIPTION                                     |              |
|----------------------|---|--------------|
| <b>GGM C6UCMPR3B</b> | CAT6 UUTP 4P 23AWG PVC CMP UL Certified, blue   | Reelex 305 m |
| <b>GGM C6UCMPR3W</b> | CAT6 UUTP 4P 23AWG PVC CMP UL Certified, white  | Reelex 305 m |
| <b>GGM C6UCMPR3Y</b> | CAT6 UUTP 4P 23AWG PVC CMP UL Certified, yellow | Reelex 305 m |



## CMR CABLES

### FEATURES

- ▶ Fire rating: CMR acc. to UL 1666 & CAN/CSA-C22.2
- ▶ Outer diameter: 6.1 mm
- ▶ Outer jacket: PVC CMR

| P/N                   | DESCRIPTION                                    |              |
|-----------------------|--|--------------|
| <b>GGM C6UTPCMR3B</b> | CAT6 UUTP 4P 23AWG PVC CMR UL Certified, blue  | Reelex 305 m |
| <b>GGM C6UTPCMR3W</b> | CAT6 UUTP 4P 23AWG PVC CMR UL Certified, white | Reelex 305 m |

## CAT6 UTP RJ45 JACKS

### FEATURES

- ▶ Compliant with ANSI/TIA-568.2-D, EN50173, and ISO/IEC 11801
- ▶ Keystone format
- ▶ For 22 to 24 AWG solid cables
- ▶ ETL certified
- ▶ To be used with GGM RAPKTOOL comfort tool



GGM RAPKC6UTPBLS



| P/N                     | DESCRIPTION  |
|-------------------------|--|
| <b>GGM RAPKC6UTPBLS</b> | Rapid Konect CAT6 U/UTP Jack Certified 4PPoE, blue       |
| <b>GGM RAPKC6UTPBWS</b> | Rapid Konect CAT6 U/UTP Jack Certified 4PPoE, white      |
| <b>GGM RAPKC6UTPYLS</b> | Rapid Konect CAT6 U/UTP Jack Certified 4PPoE, yellow     |
| <b>GGM RAPKC6UTPBKS</b> | Rapid Konect CAT6 U/UTP Jack Certified 4PPoE, black      |
| <b>GGM RAPKC6UTPGNS</b> | Rapid Konect CAT6 U/UTP Jack Certified 4PPoE, green      |
| <b>GGM RAPKC6UTPRDS</b> | Rapid Konect CAT6 U/UTP Jack Certified 4PPoE, red        |
| <b>GGM RAPKTOOL</b>     | Rapid Konect Tool - Connect all 8 wires in one operation |



GGM RAPKTOOL

## CAT6 UTP FIELD PLUG

### FEATURES

- ▶ Compliant with ANSI/TIA-568.2-D, EN50173, and ISO/IEC 11801
- ▶ Toolless termination
- ▶ 23 to 26 AWG
- ▶ To be used with GIGAMEDIA solid cables



| P/N                    | DESCRIPTION                                |
|------------------------|--|
| <b>GGM NFPLUGITC6U</b> | Toolless field plug CAT6 U/UTP solid cable |





## EMPTY 19" PATCH PANEL

| P/N                   | DESCRIPTION  |
|-----------------------|--|
| <b>GGM PAN24VKRCP</b> | Empty 19" patch panel, front identification zone with rear fixing clip |



## CAT6 U/UTP COUPLER & CONSOLIDATION POINT

| P/N                   | DESCRIPTION  |
|-----------------------|--|
| <b>GGM 6210260U00</b> | Consolidation point CAT6 U/UTP IDC Dual (LSA+/110) |
| <b>GGM 6210270U00</b> | Coupler CAT6 U/UTP RJ45 Fem/Fem black              |



## RJ45 MODULAR PLUG

| P/N                   | DESCRIPTION   |                |
|-----------------------|---|----------------|
| <b>GGM MJ8EP8CR</b>   | RJ45 UTP modular plug 8P8C for GIGAMEDIA solid cables | pack of 10 pcs |
| <b>GGM 2105XM45BL</b> | RJ45 modular blue boots                               | pack of 10 pcs |
| <b>GGM 2105XM45WH</b> | RJ45 modular white boots                              | pack of 10 pcs |



## FACEPLATES & SURFACE MOUNT BOX

| P/N                 | DESCRIPTION   |
|---------------------|---|
| <b>GGM FPCANH1P</b> | Vertical faceplate 1 port                           |
| <b>GGM FPCANH2P</b> | Vertical faceplate 2 port                           |
| <b>GGM FPCANH3P</b> | Vertical faceplate 3 port                           |
| <b>GGM FPCANH4P</b> | Vertical faceplate 4 port + 2 blankers (white)      |
| <b>GGM BOX002KV</b> | Surface mount box 2 ports for keystone with shutter |



## CAT6 U/UTP SLIM RJ45 PATCH CORD

### FEATURES

- ▶ Compliant with ANSI/TIA-568.2-D, EN50173, and ISO/IEC 11801
- ▶ AWG28/7
- ▶ Cable O.D.: 3.6 mm

| LENGTH       | BLUE                     | WHITE                    |
|--------------|--------------------------|--------------------------|
| 1 ' [0,3 m]  | <b>GGM CAT6CMS1FTBL</b>  | <b>GGM CAT6CMS1FTWH</b>  |
| 3 ' [0,9 m]  | <b>GGM CAT6CMS3FTBL</b>  | <b>GGM CAT6CMS3FTWH</b>  |
| 7 ' [2,1 m]  | <b>GGM CAT6CMS7FTBL</b>  | <b>GGM CAT6CMS7FTWH</b>  |
| 10 ' [3,0 m] | <b>GGM CAT6CMS10FTBL</b> | <b>GGM CAT6CMS10FTWH</b> |
| 15 ' [4,6 m] | <b>GGM CAT6CMS15FTBL</b> | <b>GGM CAT6CMS15FTWH</b> |
| 25 ' [7,6 m] | <b>GGM CAT6CMS25FTBL</b> | <b>GGM CAT6CMS25FTWH</b> |

## TOOLS



| P/N                  | DESCRIPTION   |
|----------------------|---|
| <b>GGM KITLC90</b>   | Tool Kit including sharp cutting pliers, stripper and LAN continuity tester |
| <b>GGM 907H468B</b>  | Professionnal RJ45 crimping tool  |
| <b>GGM 907CUT15S</b> | Sharp cutting pliers  |

**BRIDGEWATER**

149 Logan Road,  
Bridgewater,  
Nova Scotia,  
B4V 3T3  
Phone: 902-543-1112

**CHARLOTTETOWN**

11 Garfield Street,  
Charlottetown,  
Prince Edward Island,  
C1A 6A4  
Phone: 902-566-3434

**DARTMOUTH - 161 WILLIAMS AVE**

161 Williams Ave,  
Dartmouth,  
Nova Scotia,  
B3B 0B4  
Phone: 902-482-1550

**DIEPPE**

480 Adelard Savoie Boulevard,  
Dieppe,  
New Brunswick,  
E1A 7T4  
Phone: 506-382-5713

**FREDERICTON**

351 Carleton St,  
Fredericton,  
New Brunswick,  
E3B 3T8  
Phone: 506-458-9333

**HALIFAX**

3731 Mackintosh Street,  
Halifax,  
Nova Scotia,  
B3K 5A5  
Phone: 902-484-3000

**KENTVILLE**

10 Pelton Drive,  
Kentville,  
Nova Scotia,  
B4N 3V7  
Phone: 902-678-2491

**MONCTON**

1180 St. George Blvd.,  
Moncton,  
New Brunswick,  
E1E 4K7  
Phone: 506-853-8676

**MOUNT PEARL**

1144 Topsail Road,  
Mount Pearl,  
Newfoundland and Labrador,  
A1N 5E8  
Phone: 709-747-5300

**NEW GLASGOW**

99 Park Street,  
New Glasgow,  
Nova Scotia,  
B2H 5B7  
Phone: 902-753-2903

**SAINT JOHN**

1055 Old Rothesay Rd,  
Saint John,  
New Brunswick,  
E2L 4S8  
Phone: 506-633-1600

**SUMMERSIDE**


36 Jenkins Ave,  
Summerside,  
Prince Edward Island,  
C1N 6G9  
Phone: 902-436-6182

**SYDNEY**

1212 Upper Prince Street,  
Sydney,  
Nova Scotia,  
B1P 5P6  
Phone: 902-564-2645

**YARMOUTH**

29 Industry Ave,  
Yarmouth,  
Nova Scotia,  
B5A 4K3  
Phone: 902-742-9201

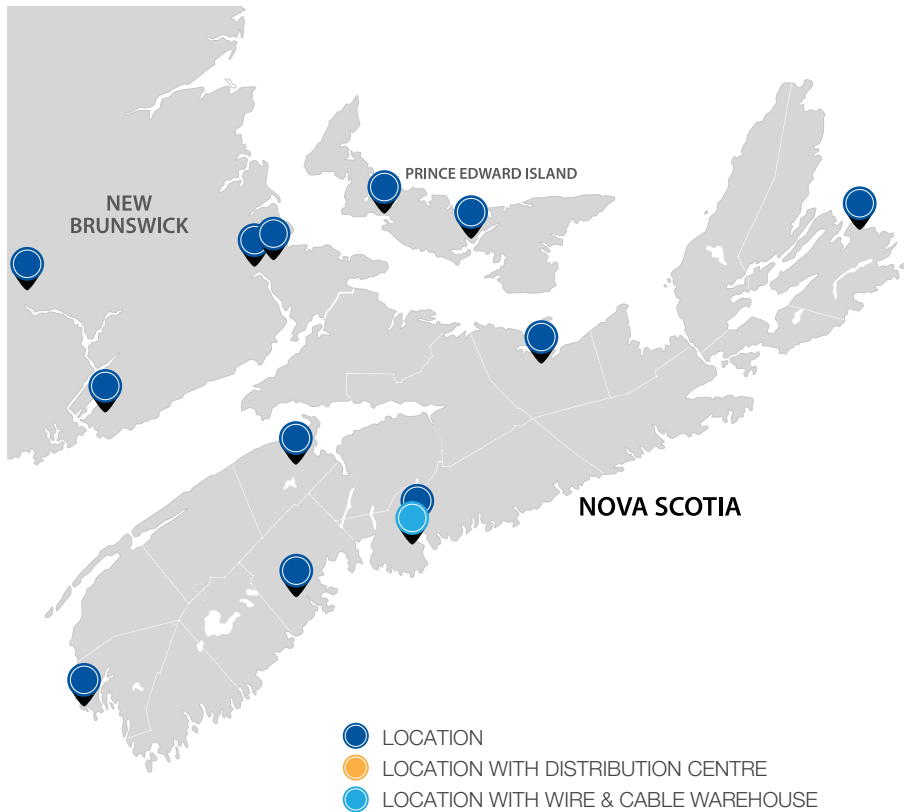

REXEL  
WEBSITE

